

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 493 789 A1

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **91122197.6**(51) Int. Cl.⁵: **A61B 17/58**(22) Date of filing: **23.12.91**(30) Priority: **29.12.90 CS 6878/90**(43) Date of publication of application:
08.07.92 Bulletin 92/28(64) Designated Contracting States:
AT BE CH DE DK ES FR GB IT LI NL SE(71) Applicant: **MUDR. MILAN KRAJICEK CSc.**
5. Kvetna 19
CS-140 00 Praha 4(CS)(72) Inventor: **MUDR. MILAN KRAJICEK CSc.**
5. Kvetna 19
CS-140 00 Praha 4(CS)(74) Representative: **Patentanwälte Beetz sen. -**
Beetz jun. Timpe - Siegfried -
Schmitt-Fumian- Mayr
Steinsdorfstrasse 10
W-8000 München 22(DE)(54) **Method and device for the osteosynthesis of bones.**

(57) The invention relates to a device and a method for the osteosynthesis of bones by intra-marrowal fixation.

The device comprises a tube (2) made of a non-elastic material, provided to be inserted into the marrow cavity of a bone (1), one end (2') being sealed, and the other end being open, and a connection part (13), comprising a fixation part (4) designed to be inserted into the tube (2) for the fixation of the tube (2) in a hole of the bone (1), and a vent part (12) designed to be inserted into the fixation part (4) and for a tight connection therewith, and comprising means (8) for connecting a line (14) for introducing a pressurized biologically inert liquid (10) into the tube (2) and releasing it therefrom, and valve means (9) for opening and closing the liquid passage therethrough. The tube (2) is filled with a biologically unob-jectionable sterilizable liquid (10), for example water, gelatine solution or dextran solution, under a pressure of 200 to 1000 kPa.

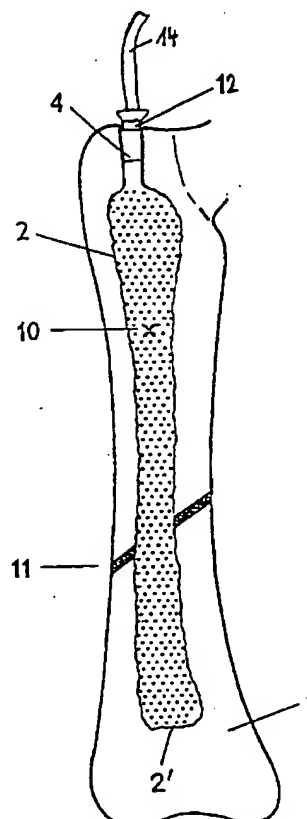


Fig. 5

EP 0 493 789 A1

The present invention relates to a method and a device for the osteosynthesis of bones by the method of intra-marrowial cavity fixation.

For the osteosynthesis of bones, i.e. the connection of fragments of bones through surgical methods, usually different kinds of wires, splints, etc., are used for external osteosynthesis. On the other hand, for the so-called intra-marrowial cavity osteosynthesis, a solid metal rod is introduced into the marrow cavity of the respective bone over its whole length, thereby stabilizing the fragments during the whole period necessary for the natural healing process. For this type of intra-marrowial osteosynthesis, a lot of different kinds and types of nails and rods has been developed, differing in their shape, form and size and the materials used.

There is no question that a correctly executed intra-marrowial osteosynthesis has a lot of advantages; however, there are also a few, but relevant disadvantages. This applies particularly for the most common method of open nailing. For this method, a relatively extensive instrumentarium is necessary, which also makes this method complex and expensive, since a broad variety of nails and rods are to be provided in view of the individual adaptation to the patient. This procedure is also time-consuming, particularly in cases when holes are to be drilled into the marrow cavity of the bone prior to the nailing, which also increases the risk of infections. Another disadvantage of this method is that the nails or rods fixed to the bone must be removed after the healing of the bone, i.e. usually within a period of about two months to about two years after application, which by itself is also a relatively demanding procedure.

It is the object of the present invention to provide a method and a device for the osteosynthesis of bones by the intra-marrowial method which overcome the above mentioned disadvantages of the prior art, simplify the whole procedure of osteosynthesis and allow a considerable reduction of the irradiation dose of the surgical team because of a substantially simpler application and removal of the device, requiring a relatively simple and universal instrumentarium, and involving a considerable lower risk of infections.

The above object is achieved according to the main claims. The dependent claims relate to preferred embodiments of the concept of the present invention.

The device according to the present invention for the osteosynthesis of bones by the intra-marrowial method is characterized by

- a tube made of a non-elastic, strong but pliable and biologically inert, sterilizable material, provided to be inserted into the marrow cavity of a bone, one end being sealed, and the other end being open,

and

- a connection part, comprising
 - a fixation part designed to be firmly inserted into the open end of the tube for the fixation of the tube in an access hole of the bone to the marrow cavity and for a tight connection with the tube, and
 - a vent part designed to be firmly inserted into the fixation part and for a tight connection therewith, and comprising means for connecting a line for introducing a pressurized biologically inert, sterilizable or sterilized liquid into the tube and releasing it therefrom, and valve means for opening and closing the liquid passage therethrough, preferably a returnable ball vent,
 - and possibly comprising the biologically inert, sterilizable or sterilized liquid contained in the tube.

The method of the present invention - which can also be used without relation to the surgical or therapeutical treatment of the human and animal body, for example for research and development purposes, animal tests, etc. - is characterized by the following steps:

- Inserting a tube made of a non-elastic, strong but pliable and biologically inert, optionally sterilized material, one end of which being sealed, and the other end being open, into the marrow cavity of a bone by means of an insertion instrument, preferably made of a metal or metal alloy, and preferably being rod-like and having a rounded end,
- introducing a fixation part designed to be firmly inserted into the open end of the tube for the fixation of the tube in the access hole of the bone to the marrow cavity and for tight connection with the tube,
- cutting the surplus part of the tube,
- introducing a vent part into the fixation part and firmly and tightly fixing it in the fixation part, the vent part comprising means for connecting a line for introducing a pressurized liquid, preferably being biologically inert, sterilizable or sterilized, into the tube and releasing it therefrom, and comprising valve means for opening and closing the liquid passage therethrough, preferably a returnable ball vent,
- introducing the pressurized liquid into the tube, preferably at a pressure of 200 to 1000 kPa,
- and
- closing the valve means and disconnecting the line from the vent part,
- and optionally connecting the line to the vent

part and releasing the liquid contained in the tube, and withdrawing the tube from the marrow cavity of the bone through the access hole.

According to a preferred embodiment of the device, the fixation part has a dowel-like form and is expandable, e.g. by inserting the vent part from its uncut end for fixing it in the access hole of the bone and for a tight connection with the tube.

The cut portion of the dowel-like fixation part preferably comprises at least one longitudinal slot, these slots preferably being regularly arranged over the circumference.

In accordance with another advantageous embodiment, the fixation part of the device comprises an internal thread, and the vent part comprises an external thread fitting into the internal thread of the fixation part, the vent part preferably being provided with a slot groove at its outer end.

Alternatively, in accordance with a further preferred embodiment, the internal portion of the fixation part and the outer portion of the vent part are designed to form a bayonet joint for tight fixation of the vent part in the fixation part.

The means for connecting the liquid line to the vent part preferably are an internal thread provided in the vent part, a flange or a sleeve.

The tube of the device is preferably made of or comprises polyethylene, polyurethane and/or polytetrafluoroethylene.

The fixation part is preferably made of a solid, inert and sterilizable material, advantageously of a metal or a metal alloy.

In accordance with yet another advantageous embodiment, the device according to the present invention further comprises means for pressurizing and supplying and draining the filling liquid, designed to be connected via the liquid line to the vent part of the connection part, for filling the tube at a predeterminable pressure, preferably within the range of 200 to 1000 kPa, and to be disconnected therefrom.

The liquid used for filling the tube is preferably a biologically inert, sterilizable liquid, advantageously water, a gelatine solution or a dextran solution. It may optionally comprise a radio-opaque material, preferably an iodine or an iodide solution, for producing a sufficient X-ray contrast.

The present invention also comprises kits of parts, comprising a device as defined above and a biologically inert, sterilizable or sterilized liquid provided to be introduced into the tube of the device and to be released therefrom after the healing period of the bone. These kits of parts may further comprise means for pressurizing and releasing the liquid through a line connectable to the vent part of the device, preferably comprising pumping means such as a peristaltic pump, a liquid reservoir,

valves and a pressure gauge.

The basic advantage of the concept of the present invention is the application of the physical principle of non-compressibility of liquids. For inserting the tube into the bone, only one access hole is to be drilled into the marrow cavity, and then the tube made of a non-elastic, pliable material is inserted through the access hole by means of an insertion instrument preferably made of a metal or a metal alloy, and preferably being rod-like and having a rounded end. After insertion, the tube is fixed in the access hole of the bone, e.g. by the dowel-like fixation part into which the vent part is firmly inserted thereafter. Subsequently, the system is filled under a predetermined pressure, preferably using a biologically inert liquid as defined above. During the filling procedure, the necessary rearrangement and adjustment of the bone fragments may be performed, which represents a considerable advantage. When the predetermined maximal pressure within the tube inside the marrow cavity of the bone has been reached, a perfect cast has been formed, the stability and tenacity of which is comparable to any type of nail and/or rod fixation.

The removal of the device after the healing period is very simple, because after release of the liquid, the other parts of the device, i.e. the connection part and the tube, may be removed without any problem. In comparison with all presently used kinds of intra-marrowial osteosynthesis, the device according to the present invention leads to a significant simplification of the whole procedure, which is of highest surgical and therapeutical value because the operation time can be significantly reduced, less drillings of bones are necessary, the total instrumentarium is extremely simple and universally applicable, and the infection risks are minimized particularly due to the reduction of the surgical operation time and the reduced number of drillings. Furthermore, the substantial reduction of costs involved leads to considerable savings regarding both the method and the device and materials.

In the following, the invention will be explained in more details with reference to the accompanying drawings, relating to a preferred embodiment of the device according to the present invention.

Fig. 1 is a schematic representation of the non-elastic, pliable but strong tube with sealed lower end, introduced into the marrow cavity of a bone;

Fig. 2 is a schematic representation of a dowel-like fixation part for the fixation of the tube in the access hole to the marrow cavity of a bone;

Fig. 3 is a schematic representation of the vent part of the device;

Fig. 4 is a schematic representation of the complete connection part comprising the fixation part and the vent part, allowing the inflow and the outflow of a liquid, the vent part and the fixation part being the same as shown in Figs. 2 and 3, respectively;

Fig. 5 is a schematic representation of the device of the present invention introduced into a long bone with a transversal fracture.

As may be seen from Figs. 1 to 4, the device comprises a tube 2 made of a non-elastic, pliable but strong material. The tube 2 may be inserted by means of an insertion instrument 3 into the marrow cavity of a bone 1.

The tube 2 is preferably made from a biologically inert, sterilized material, for example of polyethylene, polyurethane and/or polytetrafluoroethylene. One end 2' of the tube 2, i.e. the internal end, is sealed, and the other end is open. Into the open end of the tube 2, the fixation part 4 is introduced for the fixation of the tube in the bone 1, and for a firm connection to the fixation part. The fixation part 4 as shown in Fig. 2 comprises a longitudinal slot, allowing an expansion of the dowel-like fixation part, as may be seen from Fig. 4. The vent part 12 shown in Fig. 3 is firmly insertable into the fixation part 4, thus forming the connection part 13 of the device of the present invention, which allows the inflow and outflow of a filling liquid. During the procedure of osteosynthesis, the tube 2 is filled with a biologically inert, unobjectionable sterile liquid 10, for example water, gelatine solution or dextran solution, advantageously under a pressure of 200 to 1000 kPa.

The fixation part 4 is preferably dowel-like, as shown in Figs. 2 and 4, and its non-cut end is provided with an internal thread 5 fitted to the external thread 6 of the vent part 12. The cut end of the fixation part 4 is provided with at least one longitudinal slot 4', these slots preferably being regularly distributed along the circumference of the fixation part 4. In view of the drilling of a hole into the bone to be fixed, the fixation part 4 and the vent part 12 of the connection part 13 preferably are of round, mainly cylindrical shape.

The fixation part 4 is preferably made of a metal, solid, inert and sterilizable material. The external thread 6 of the vent part 12 serves for screwing the vent part 12 into the internal thread 5 of the fixation part 4. The vent part 12 is further provided on its outer end with a slot groove 7 and comprises an internal thread 8 for the line 14 (Fig. 5) for the liquid 10. The line 14 may be connected to the means for pressurizing and releasing the filling liquid 10. The vent part 12 comprises a vent 9 which advantageously is a returnable ball vent.

The vent 9 is preferably provided in the middle part of the vent part 12.

Instead of the connection of the fixation part 4 and the vent part 12 by means of a screw-like mechanism, it is possible to provide a bayonet joint connection for the fixation of the vent part 12 in the fixation part 4, the internal portion of the fixation part 4 and the outer portion of the vent part 12 being correspondingly adapted to each other. The tube 2 is filled with the liquid 10, preferably comprising a radio-opaque material, for example an iodine solution.

As may be seen from Fig. 5, the non-elastic, pliable but strong tube 2 with sealed internal end is introduced into the marrow cavity of a bone 1 having a transversal fracture 11. This tube 2 is inserted by means of the insertion instrument 3 (Fig. 1), advantageously made of a metal or metal alloy. The fixation part 4 of dowel-like form is then inserted into the open end of the tube, wherein the pressure exerted by the preferably expanded fixation part guarantees the firm fixation of the tube 2 in the access hole of the bone 1 and the tight connection between the tube 2 and the fixation part 4. After the insertion of the fixation part, the surplus part of the tube 2 is cut off. Subsequently, the vent part 12 provided with an external thread 6 is firmly screwed into the internal thread 5 of the fixation part 4. The screwing of the vent part 12 into the fixation part 4 may be facilitated by the slot groove 7 provided at the outer end of the vent part 12. The vent part 12 comprises in that end portion an internal thread 8 into which a line, flange or sleeve may be screwed in for connecting the line 14 for the liquid 10 from and to a pressure pump. The vent part 12 is further provided with the vent 9, for example with a returnable ball vent. According to this embodiment, the vent part 12 also provides the internal mechanism for expanding the dowel-like fixation part 4 by screwing-in.

As may be seen from Fig. 5, the device according to the present invention may also be inserted into long bones 1 having a transversal fracture 11 because the length of the tube 2 may be easily adapted to the respective length of the marrow cavity of the bone 1. This represents a considerable further advantage of the present invention because only one kind of tubes may be used for very different kinds of bones, by simply cutting the surplus tube at the end of the access hole. Fig. 5 shows the fixation of the tube 2 in the access hole of the bone 1 by means of the fixation part 4 of the connection part 13. Fig. 5 further shows the line 14 through which the liquid 10 is introduced into the tube 2 and released therefrom after the healing period, prior to simply withdrawing the tube through the access hole. The connection part 13 accordingly allows an easy inflow and outflow of

the filling liquid 10 which is introduced for osteosynthesis under a predetermined, suitable pressure.

The tube 2 of the device of the present invention forms, after insertion into the bone, a kind of solid mould, with an ideal adaptation of its shape to the natural internal form of the marrow cavity. After the filling procedure the line 14 to the pressure pump is disconnected from the connection part 13. After the fracture 11 is healed, the whole device may be easily removed from the bone after release of the liquid 10.

Thus, the concept of the present invention represents a significant technological and surgical advance in the field of osteosynthesis.

List of reference numerals

1	bone	
2	tube	
2'	sealed end of tube 2	
3	insertion instrument	
4	fixation part	
4'	longitudinal slot	
5	internal thread of fixation part 4	5
6	external thread of vent part 12	
7	slot groove of vent part 12	
8	internal thread of vent part 12	
9	vent	
10	liquid	10
11	transversal fracture of bone	
12	vent part	
13	connection part, comprising fixation part 4 and vent part 12	
14	line for liquid 10	15

Claims

1. Device for the fixed osteosynthesis of bones by the intra-marrowial method,

characterized by

- a tube (2) made of a non-elastic, strong but pliable and biologically inert, sterilizable material, provided to be inserted into the marrow cavity of a bone (1), one end (2') being sealed, and the other end being open,

and

- a connection part (13), comprising
 - a fixation part (4) designed to be firmly inserted into the open end of the tube (2) for the fixation of the tube (2) in an access hole of the bone (1) to the marrow cavity and for a tight connection with the tube (2),

and

- a vent part (12) designed to be firmly inserted into the fixation part (4) and for a tight connection therewith, and comprising means (8) for connecting a line (14) for introducing a pressurized biologically inert, sterilizable or sterilized liquid (10) into the tube (2) and releasing it therefrom, and valve means (9) for opening and closing the liquid passage therethrough, preferably a returnable ball vent,
- and possibly comprising the biologically inert, sterilizable or sterilized liquid (10) contained in the tube (2) (Figs. 1 - 5).

2. The device according to claim 1, characterized in that the fixation part (4) has a dowel-like form and is extensible by inserting the vent part (12) from its uncut end for fixing it in the access hole of the bone (1) and for a tight connection with the tube (2).
3. The device according to claim 2, characterized in that the cut portion of the dowel-like fixation part (4) comprises at least one longitudinal slot (4'), the slots (4') preferably being regularly arranged over the circumference.
4. The device according to claims 1 to 3, characterized in that the fixation part (4) comprises an internal thread (5), and the vent part (12) comprises an external thread (6) fitting into the internal thread (5) of the fixation part (4), the vent part (12) preferably being provided with a slot groove (7) at its outer end.
5. The device according to claims 1 to 4, characterized in that the internal portion of the fixation part (4) and the outer portion of the vent part (12) are designed to form a bayonet joint for tight fixation of the vent part (12) in the fixation part (4).
6. The device according to claims 1 to 5, characterized in that the means (8) for connecting the liquid line (14) are an internal thread, a flange or a sleeve.
7. The device according to claims 1 to 6, characterized in that the tube (2) is made of or comprises polyethylene, polyurethane and/or polytetrafluoroethylene.
8. The device according to claims 1 to 7, characterized in that the fixation part (4) is made of a metal or a metal alloy.

9. The device according to claims 1 to 8, characterized in that it further comprises means for pressurizing and supplying and draining the liquid (10), designed to be connected via the line (14) to the vent part (12) of the connection part (13), for filling the tube (2) at a predeterminable pressure, preferably a pressure of 200 to 1000 kPa, and to be disconnected therefrom.

10. The device according to claims 1 to 9, characterized in that the biologically inert, sterilizable liquid (10) is water, a gelatine solution or a dextran solution, optionally comprising a radio-opaque material, preferably an iodine or an iodide solution.

11. A method for the fixed osteosynthesis of bones by means of intra-marrowial fixation,

with exception of osteosynthesis of the human and animal body for surgical and therapeutical purposes,

characterized by

- inserting a tube (2) made of a non-elastic, strong but pliable and biologically inert, optionally sterilized material, one end of which (2') being sealed, and the other end being open, into the marrow cavity of a bone (1) by means of an insertion instrument (3), preferably made of a metal or metal alloy, and preferably being rod-like and having a rounded end,
- introducing a fixation part (4) designed to be firmly inserted into the open end of the tube (2) for the fixation of the tube (2) in the access hole of the bone (1) to the marrow cavity and for tight connection with the tube (2),
- cutting the surplus part of the tube (2),
- introducing a vent part (12) into the fixation part (4) and firmly and tightly fixing it in the fixation part (4), the vent part (12) comprising means (8) for connecting a line (14) for introducing a pressurized liquid (10), preferably being biologically inert, sterilizable or sterilized, into the tube (2) and releasing it therefrom, and comprising valve means (9) for opening and closing the liquid passage therethrough, preferably a returnable ball vent,
- introducing the pressurized liquid (10) into the tube (2), preferably at a pressure of 200 to 1000 kPa,

and

- closing the valve means (9) and discon-

necting the line (14) from the vent part (12).

- and optionally connecting the line (14) to the vent part (12) and releasing the liquid (10) contained in the tube (2), and withdrawing the tube (2) from the marrow cavity of the bone (1) through the access hole.

12. Kit of parts, comprising

(a) a device according to one of claims 1 to 10,

and

(b) a biologically inert, sterilizable or sterilized liquid (10) provided to be introduced into the tube (2) of the device.

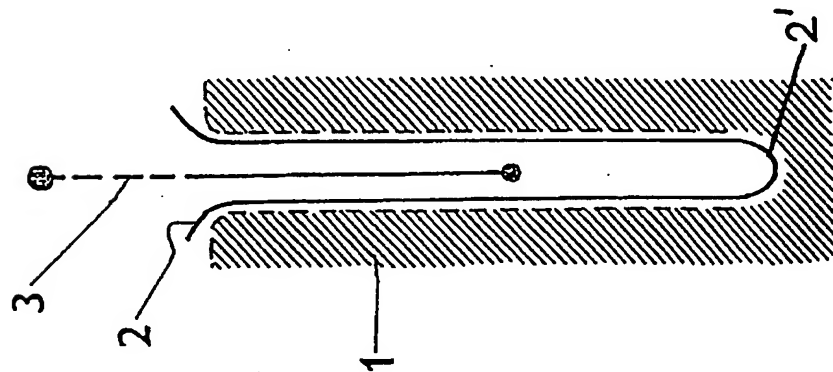


Fig. 1

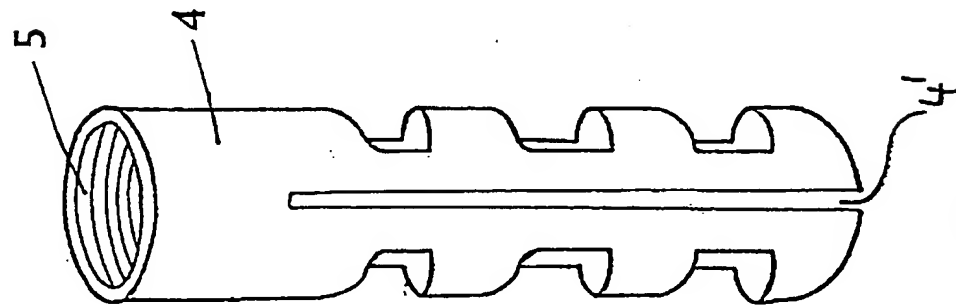


Fig. 2

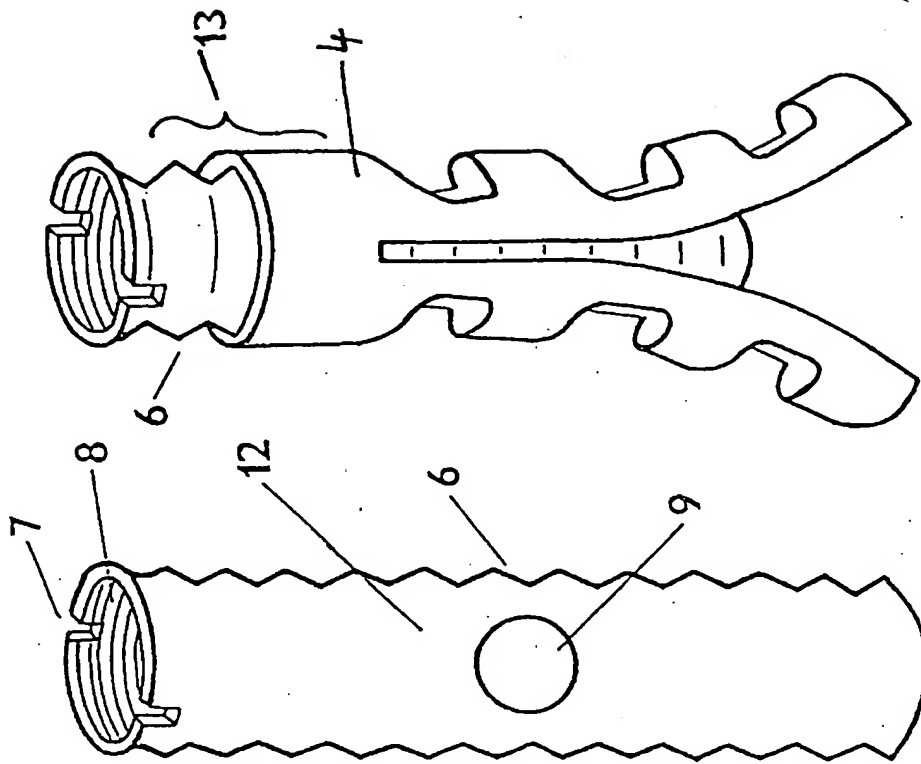


Fig. 3

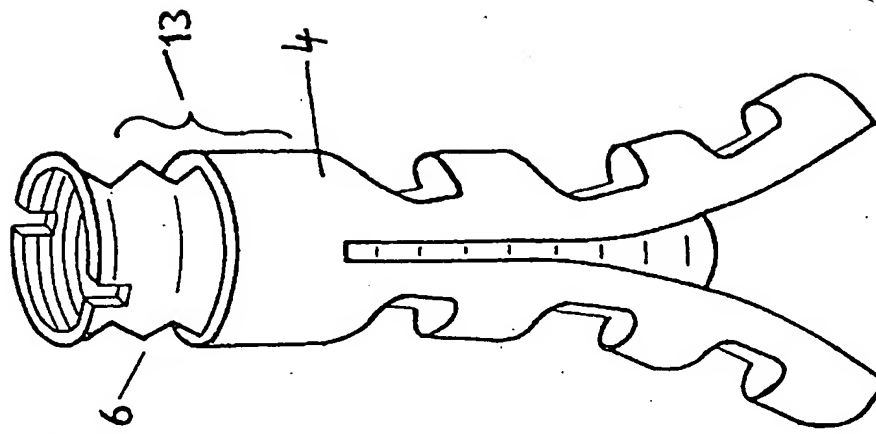


Fig. 4

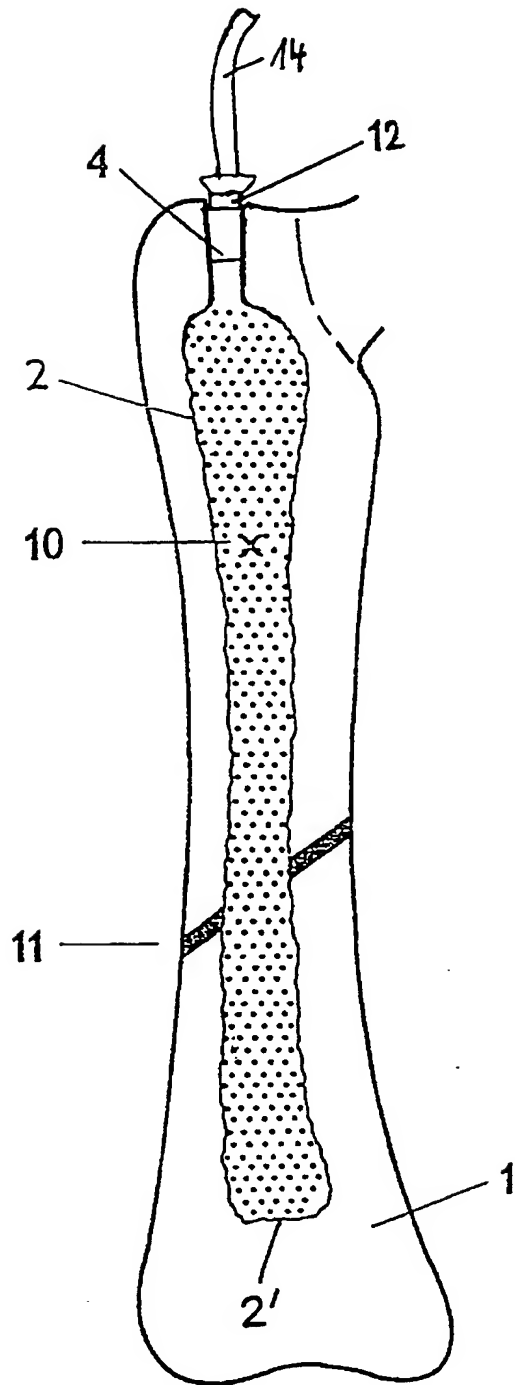


Fig. 5



European Patent
Office

PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 45 of the European Patent Convention
shall be considered, for the purposes of subsequent
proceedings, as the European search report

EP 91 12 2197

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.5)
A	EP-A-0 061 993 (MECRON) * Figure 1; abstract *	1	A 61 B 17/58
A	US-A-4 369 772 (MILLER) * Claim 1 *	1	
A	US-A-3 312 213 (TIMM) * Figure 1 *	1	
A	WO-A-8 804 914 (MAI)		
A	DE-U-8 621 140 (LIXL)		
A	US-A-4 888 022 (HUEBSCH)		
			TECHNICAL FIELDS SEARCHED (Int. CL.5)
			A 61 B A 61 F
INCOMPLETE SEARCH			
<p>The Search Division considers that the present European patent application does not comply with the provisions of the European Patent Convention to such an extent that it is not possible to carry out a meaningful search into the state of the art on the basis of some of the claims</p> <p>Claims searched completely : Claims searched incompletely : 11 Claims not searched : Reason for the limitation of the search:</p> <p>"Method of osteosynthesis" is in contradiction with lines 3 and 4 of claim 11.</p>			
Place of search THE HAGUE		Date of completion of the search 02-04-1992	Examiner BARTON S.A.
CATEGORY OF CITED DOCUMENTS			
<p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (01/91) (P0407)

THIS PAGE BLANK (USPTO)